




HVAC protection
SOLUTIONS

Flaretite - Refrigeration & Gas Seals
The ultimate solution for eliminating leaks!

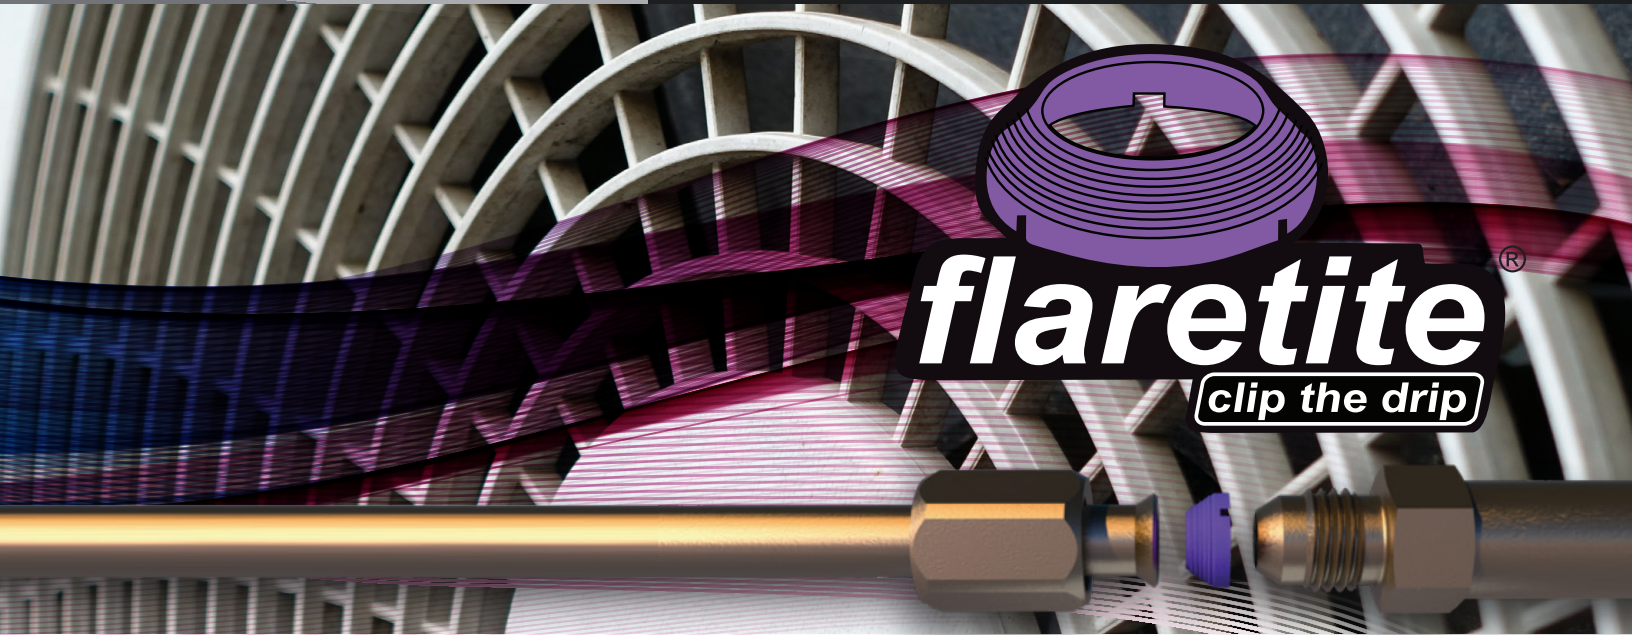

flaretite[®]
clip the drip

SLASH THE COSTS OF SERVICING, DOWNTIME & CALL BACKS.

COMPATIBLE WITH ALL COMMON REFRIGERANTS INCLUDING POE & PVE OILS




- For common aluminum and brass fittings.
- SAE (US Standard) 45° flare seals for inch tubing sizes.
- Stamped copper seal with standard Loctite Vibra seal coating.
- Rated for -40° F to 300° F temperature & all common gases & fluids.
- 5 sizes & 21 combinations: 1/4" • 3/8" • 1/2" • 5/8" • 3/4"

**GREAT FOR INSTALLING MINI-SPLIT
& VRF SYSTEMS**

APPLICATION • Used to prevent leaks that are caused by galling, vibration, pulsation & extreme temp changes • A perfect solution for a leak free connection in today's harshest environments

RECOMMENDED FOR

- Service & repair
- Mini-Split & VRF installations
- Commercial chillers & coolers
- Marine & aviation refrigeration



| Code | Description | Qty. |
|-------|---|--------------|
| 97210 | Combo Kit - 9 seals each of sizes 1/4", 3/8", 1/2", 5/8" (36 seals total) | 6 kits/case |
| 97211 | Combo Kit - (2) 3/8", (2) 3/4" | 10 kits/case |
| 97212 | Combo Kit - (2) 3/8", (2) 5/8" | 10 kits/case |
| 97213 | Combo Kit - (2) 3/8", (2) 1/2" | 10 kits/case |
| 97214 | Combo Kit - (2) 1/4", (2) 5/8" | 10 kits/case |
| 97215 | Combo Kit - (2) 1/4", (2) 1/2" | 10 kits/case |
| 97216 | Combo Kit - (2) 1/4", (2) 3/8" | 10 kits/case |
| 97217 | (10) 3/4" Seal Kit | 10 kits/case |
| 97218 | (10) 5/8" Seal Kit | 10 kits/case |
| 97219 | (10) 1/2" Seal Kit | 10 kits/case |
| 97220 | (10) 3/8" Seal Kit | 10 kits/case |
| 97221 | (10) 1/4" Seal Kit | 10 kits/case |
| 97222 | (200) 5/8" Seal Kit | 4 kits/case |
| 97223 | (200) 1/2" Seal Kit | 4 kits/case |
| 97224 | (200) 3/8" Seal Kit | 4 kits/case |
| 97225 | (200) 1/4" Seal Kit | 4 kits/case |
| 97226 | (100) 3/4" Seal Kit | 4 kits/case |
| 97227 | (100) 5/8" Seal Kit | 4 kits/case |
| 97228 | (100) 1/2" Seal Kit | 4 kits/case |
| 97229 | (100) 3/8" Seal Kit | 4 kits/case |
| 97230 | (100) 1/4" Seal Kit | 4 kits/case |

FEATURES

- 45° Copper Stamping with Loctite coating
- Locking tabs clip seal securely on fitting
- Conical rings for multiple points of contact
- Made for all common 45° fittings
- Rated for -40°F to 300°F
- Pressure rated up to 10,000 psi

Manufacturer's Torque Specifications (ft-lbs)

| | 1/4" | 3/8" | 1/2" | 5/8" | 3/4" |
|------------|-----------|-----------|-----------|-----------|-------------|
| Daikin | 10.4-12.7 | 24.1-29.4 | 36.5-44.5 | 45.6-55.6 | 71.7-87.5 |
| LG | 13.9-18 | 24.5-30.3 | 39.7-47.7 | 45.5-59.2 | 71.61-87.52 |
| Fujitsu | 11.8-13.3 | 23.6-31.0 | 36.1-45.0 | 46.5-55.3 | 66.4-81.1 |
| Mitsubishi | 10-13.1 | 25-30 | 36-42 | 54-58 | - |
| Gree | 10-13.1 | 25-30 | 36-45 | 50-60 | - |

Flaretite Recommended Torque Specifications (CU-SPP)

| 1/4" | 3/8" | 1/2" | 5/8" | 3/4" |
|--------------|--------------|--------------|--------------|--------------|
| 14-18 ft-lbs | 24-30 ft-lbs | 40-47 ft-lbs | 46-59 ft-lbs | 72-86 ft-lbs |

RectorSeal, LLC 2601 Spenwick Drive - Houston, TX 77055 800-231-3345 rectorseal.com
PO Box 5092 Hoppers Crossing, VIC 3029, Australia 07-3267-7277 rectorseal.com.au