

Condensate Removal Pumps

VCMA SERIES

High Capacity Model

Applications

- For removal of condensate from air conditioners, condensing boilers, refrigerated display cabinets, and dehumidifiers

Features

- Fully automatic: start, stop, safety switch
- Operating point: 4 m: 70 l/h
- Check valve outlet: 9.5 mm, for 9.5 mm ID tubing
- 2.0 l tank capacity
- Thermally protected motor
- IP 20
- CE, TÜV and BAU approved
- Options: 6 m tubing (VCMA-20ST) and/or CEE electric plug
- 1/30 HP high performance motor
- ABS tank, motor cover, and volute
- Stainless steel shaft
- Removable 9.5 mm barbed check valve
- 3 inlet drain holes

Series Specifications

Capacity: 273 LPH @ 0.31 m
Shut Off: 4.3 m
Liquid Temperature: 50°C
Discharge: 9.5 mm
Impeller: Glass-filled polypropylene

Electrical: 230V, 50Hz
 0.6 amps, 60 watts
Operation: Automatic



Model Characteristics

Model	Volts	Cord	Capacity	Weight (Kg.)
VCMA-20S	230	1.83 m	273 LPH @ 0.31 m	2.26
VCMA-20ST	230	1.83 m	273 LPH @ 0.31 m	2.72



CE

VCMA-20S

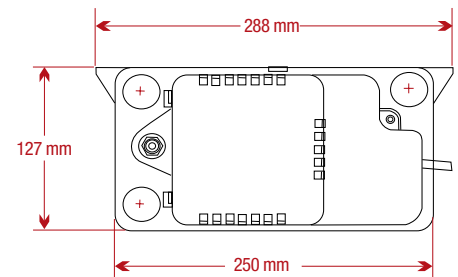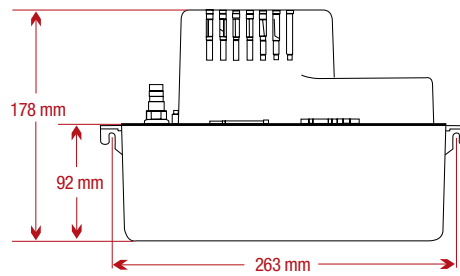

Performance Curve VCMA-20S 230V, 50Hz

