

Regulators/Replacement Gauges



Nitrogen/CO₂ Regulators

FOR U.S. JOBS
UNIWELD EMPLOYS OVER 300 WORKERS


Regulators for use with Nitrogen or CO₂ (with optional F36 adaptor) that have been specially designed for purging and pressure testing. Large "T" handle with stainless steel pressure adjusting screw and bushing prevent galling.

7 Nitrogen & CO₂



Reseatable Safety Blowoff
Opens at 850-875 PSI

RHP800
Nitrogen Regulator

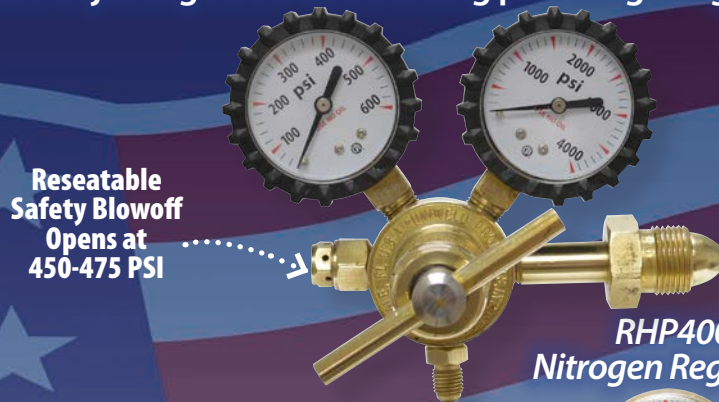

Reseatable Safety Blowoff
Opens at 450-475 PSI

RHP400
Nitrogen Regulator

F36 Adaptor
CO₂ Cylinder
(CGA320) to
Nitrogen (CGA580)



Part#	UPC#	CGA Inlet	Outlet Connection	Gauges Delivery/Contents	Delivery PSIG
RHP400	13000	580	1/4" M.F.	[G8SD] 600/4000 [G7SD]	0-400
RHP500	13100	580	1/4" M.F.	[G8SD] 600/4000 [G7SD]	0-500
RHP800	13800	580	1/4" M.F.	[G34SD] 1000/4000 [G7SD]	0-800

Part#	Pressure	Diam.	Case	N.P.T.
G34SD	1000 psi	2"	Gold Steel Case	1/4"
G7SD	4000 psi	2"	Gold Steel Case	1/4"
G8SD	600 psi	2"	Gold Steel Case	1/4"

NOTE: REPLACEMENT GAUGES DO NOT INCLUDE 2" GAUGE BOOT [SOLD SEPARATELY]

GB20S

2" Gauge Boot Set (2) Black



Nitrogen and CO₂ Regulators

A compact, proven design for soft drink dispensing systems (not beer) and for many types of pressurizing applications. Features include: an adjustable pressure screw with locking nut and a self re-seating relief valve (not designed to protect downstream systems).

	CO ₂ Part#	Nitrogen Part#	1 1/2" Gauges/Delivery	Delivery PSIG
Single Gauge Regulator	R1346	R1546	60 [G83D]	2-50
	R1349	R1549	300 [G84D]	2-175
	CO ₂ Part#	Nitrogen Part#	Nitrogen/CO ₂ Delivery/Contents	Delivery PSIG
Dual Gauge Regulator	R1358	R1558	[G20D] 15/4000 [G82D]	2-12
	*R1360	*R1560	[G83D] 60/4000 [G82D]	2-50
	*R1362	*R1562	[G78D] 200/4000 [G82D]	5-120
	*R1363	*R1563	[G84D] 300/4000 [G82D]	5-175



R1563

- CGA320-CO₂ inlet connection with O-ring
- CGA580-Nitrogen inlet connection
- 1/4" SAE flare outlet
- U.L. Listed

*Gauges shipped with protective boots



Uniweld Products, Inc. Fort Lauderdale, FL 33312 U.S.A. Customer Service: 800.323.2111
info@uniweld.com • www.uniweld.com

79



Replacement Gauges/Lenses/Boots

Welding Gauges

FOR U.S. JOBS
UNIWELD EMPLOYS OVER 300 WORKERS



G15D



PSI Only



**PSI/Kg
Add (-1)
to Part#**



**PSI/kPa
Add (-2)
to Part#**



**PSI/Bar
Add (-3)
to Part#**

**1 1/2" GAUGES
[1/8" NPT]**

**2" GAUGES
[1/4" NPT**]**

**2 1/2" GAUGES
[1/4" NPT**]**

Pressure Calibration

Powder Painted Steel Case B.M.

Gold Steel Case B.M.

Gold Steel Case C.B.M.

Brass Case B.M.

Brass Case C.B.M.
WITH WEEP HOLE

Gold Steel Case B.M.

Brass Case B.M.

Gold Steel Case B.M.

15 PSI	-	G20D [BLUE]	-	-	-	-	-	-
30 PSI [Red Line 15-30]	G15D* (Red)	G79D*	-	G2D	-	G2SD	G22D	G22SD
30 PSI	-	G80D*	-	G74D	-	G74SD	G75D	G75SD
60 PSI	-	G83D*	-	G5D	G105	G5SD	G25D	G25SD
100 PSI	G49D* (Green)	G85D*	G185	G6D	G106	G6SD	G26D	G26SD
200 PSI	-	G78D*	G178	G4D	G104	G4SD	G24D	G24SD
300 PSI	-	G84D*	G184	G33D	-	G33SD	-	-
400 PSI	-	G73D*	-	G1D	G101	G1SD	G21D	G21SD
1/4, 1/2, 3/4 CONTENTS	G19D* (Red)	-	-	-	-	-	-	-
600 PSI	-	-	-	G8D	G108	G8SD	G28D	G28SD
1000 PSI	-	-	-	G34D	-	G34SD	-	-
4000 PSI, UL LISTED	G56D* (Green)	G82D*	G182	G7D	-	G7SD	G27D	G27SD
6000 PSI, UL LISTED	-	-	-	G44D	-	G44SD	G46D	G46SD

B.M. = Bottom Mount. C.B.M. = Center Back Mount. * With Gauge Boot.
** For 1/8" NPT add [-4] to Part Number.



1 1/2" Gauge Boot Set Black

GB15S

Replacement Lenses



**GB20S
2" Gauge Boot Set Black**

	Part#	1 1/2" Description	Part#	2" Description	Part#	2 1/2" Description
DISPLAY CARD	PL15	Posi-Lock	PL2	Posi-Lock	PL25	Posi-Lock
BULK	05-1-52	Flat Plastic	05-2-52-4	Flat Plastic	05-3-52-8	Posi-Lock
	05-1-52-7	Posi-Lock	05-2-52-7	Posi-Lock		
	05-1-63	Friction Ring	05-2-63-2	Friction Ring		



Uniweild Products, Inc. Fort Lauderdale, FL 33312 U.S.A. Customer Service: 800.323.2111
info@uniweild.com • www.uniweild.com

97

9 Gauges